



نېوغ سارمايش



NOBOUGH SARMAYESH



Nobough Sarmayesh Doors

Nobough Sarmayesh is a manufacturer of a wide range of chill rooms, freezing rooms, and industrial doors. The flexibility of solutions offered by Nobough Sarmayesh has been based on a comprehensive range of standard doors with hinged, sliding or automatic operation be it single or double leaved with the following finishes: either stainless, galvanized or colored steel, and maximum open height of 3400 mm and width of single leaf door 2400 mm. Optional accessory include locks with internal emergency opening mechanism and door protection guards.

Chill Room Doors:

The design is aimed for the food industry and the construction is of 70 or 100 mm injected polyurethane.

Freezing Room Doors:

The design is aimed for the food industry and the construction is of 1300 mm injected polyurethane with strategically positioned electric heater tapes for the prevention of unwanted freezing air moisture.

PVC Doors:

PVC swing doors are used on passages where drought may cause problems or to minimize heat transfer due to infiltration.

Industrial Doors:

For various applications air tight i.e. laboratories of various kinds. Where required twin leaved perspex windows can be fitted.

Manual Doors:

With constant research, NOBOUGH SARMAYESH has developed very high quality doors as the standard for its customers, including ease of operation and installation with minimum maintenance.

Automatic Doors:

With simple rack and pin system fitted to sliding doors the whole operation of the door is automated and can be opened or closed either by a switch fitted very close to the door, chain and micro switch or by one of the remote electronic transmitters.

MODEL DESIGNATION



نېوېغ سرمايش

NOBOUGH SARMAYESH

NS D S H T* 21 28

Height (dm)

Width (dm)

Thickness

T 07: 70 mm

T 10: 100 mm

T 13: 130 mm

Door Type

S: Sliding

H: Hinged

Door kind

S: Single

D: Double

DOOR

NOBOUGH SARMAYESH

SINGLE SLIDING DOORS / CHILL




نوبوغ سرمایش

Manual chill sliding door made from galvanized steel, stainless steel, or colored steel.

SARMAYESH

NOBOUGH

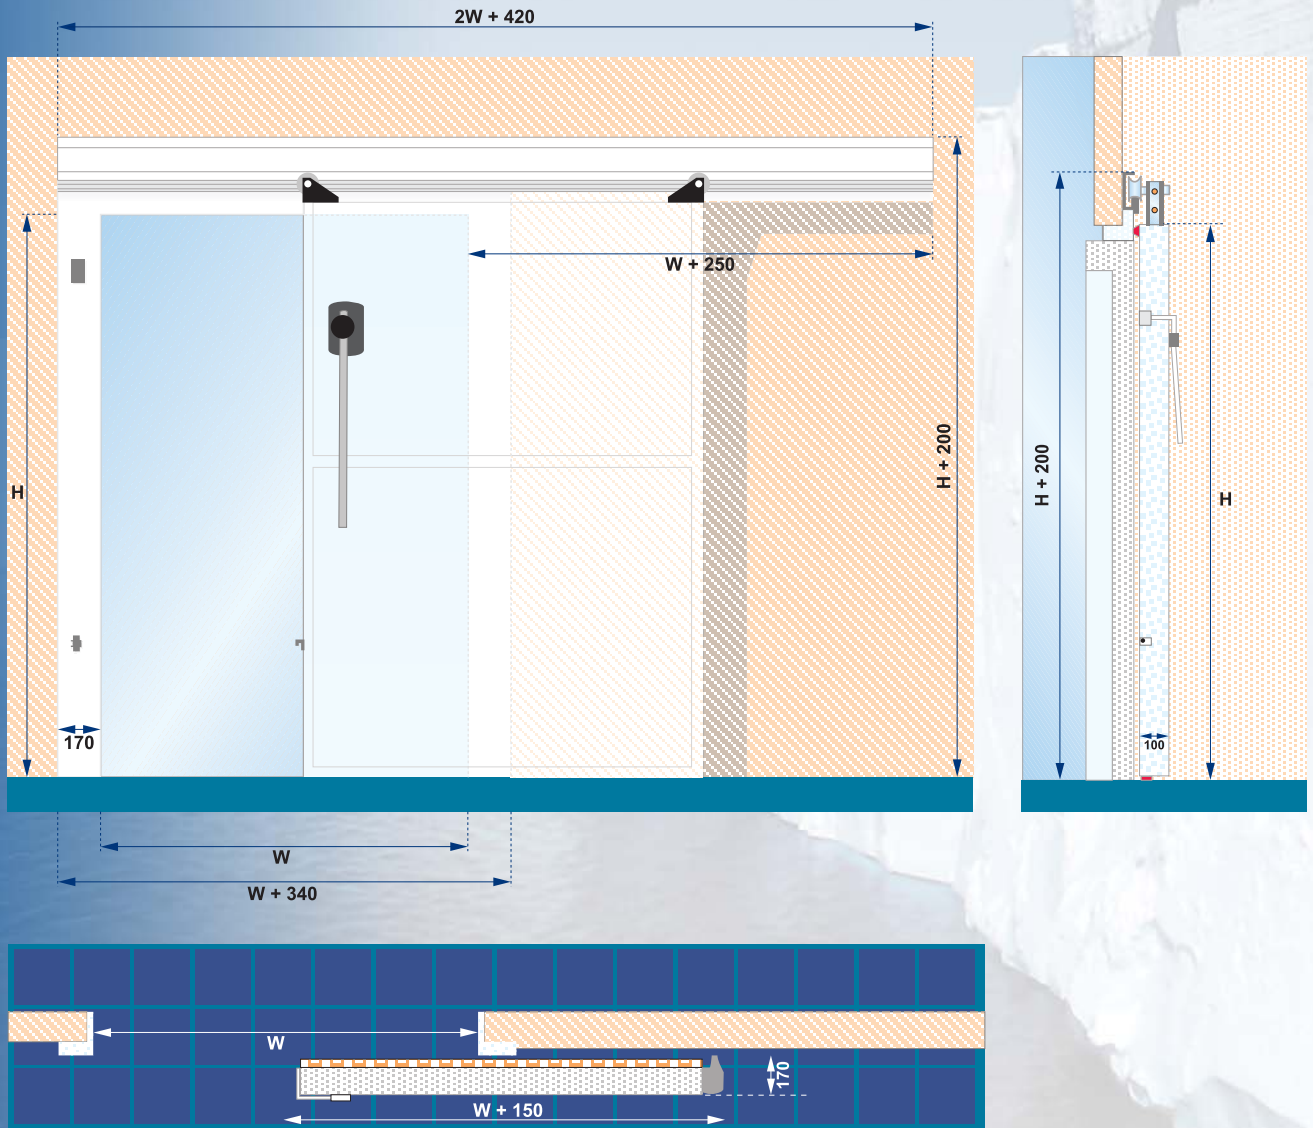

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD SS-T*-0719	85 X 193	70 X 190
NSD SS-T*-0919	105 X 193	90 X 190
NSD SS-T*-1222	135 X 223	120 X 220
NSD SS-T*-1522	165 X 223	150 X 220
NSD SS-T*-1825	195 X 253	180 X 250
NSD SS-T*-2125	225 X 253	210 X 250
NSD SS-T*-2128	225 X 283	210 X 280
NSD SS-T*-2428	255 X 283	240 X 280
NSD SS-T*-2431	255 X 313	240 X 310
NSD SS-T*-2434	255 X 343	240 X 340

Door Insulation : PUR/foam plates 40 kg/m³.

Sliding Rail : Saltwater resistant anodized aluminium profile with polyamide rollers and galvanized steel pin bolt.

Frame : Galvanized steel, Stainless steel, or colored steel.

Handle : Solid stainless steel.

Bottom guide : Saltwater resistant anodized aluminium profile.

T*: T 07 or T 10 or T 13.

NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.


SINGLE HINGED DOORS / CHILL



نوبوغ سرمايش

Manual chill hinged door made from galvanized steel, stainless steel, or colored steel.

NOBOUGH SARMAYESH

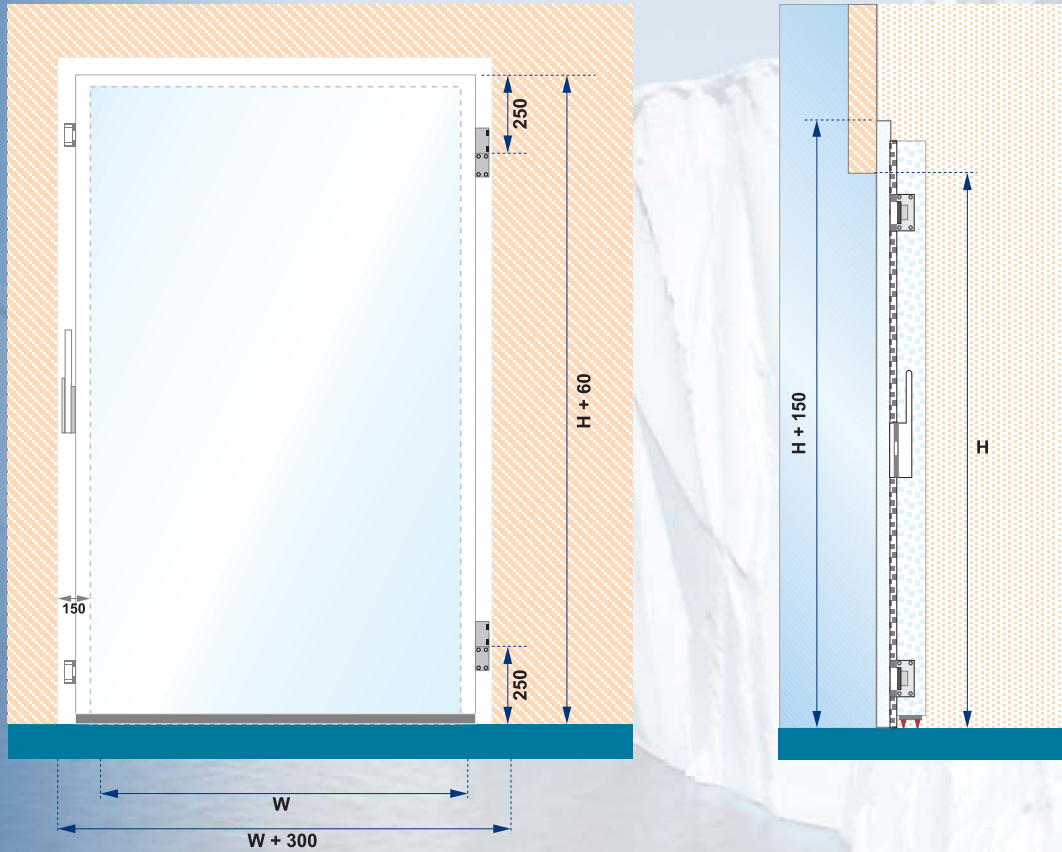

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD SH-T*-0719	85 X 193	70 X 190
NSD SH-T*-0919	105 X 193	90 X 190
NSD SH-T*-1222	135 X 223	120 X 220
NSD SH-T*-1522	165 X 223	150 X 220
NSD SH-T*-1825	195 X 253	180 X 250
NSD SH-T*-2125	225 X 253	210 X 250
NSD SH-T*-2128	225 X 283	210 X 280
NSD SH-T*-2428	255 X 283	240 X 280
NSD SH-T*-2431	255 X 313	240 X 310
NSD SH-T*-2434	255 X 343	240 X 340

- Door Insulation :** PUR/foam plates 40 kg/m3.
- Hinges :** Die cast alloy execution with stainless steel pin and non-friction bushings.
- Frame :** Galvanized steel, Stainless steel, or colored steel.
- Handle :** Die cast alloy.
- Bottom guide :** Saltwater resistant anodized aluminium profile..

T*: T 07 or T 10 or T 13.

NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.


DOUBLE SLIDING DOORS / CHILL



نوبوغ سرمایش

Manual chill sliding door made from galvanized steel, stainless steel, or colored steel.

NOBOUGH SARMAYESH

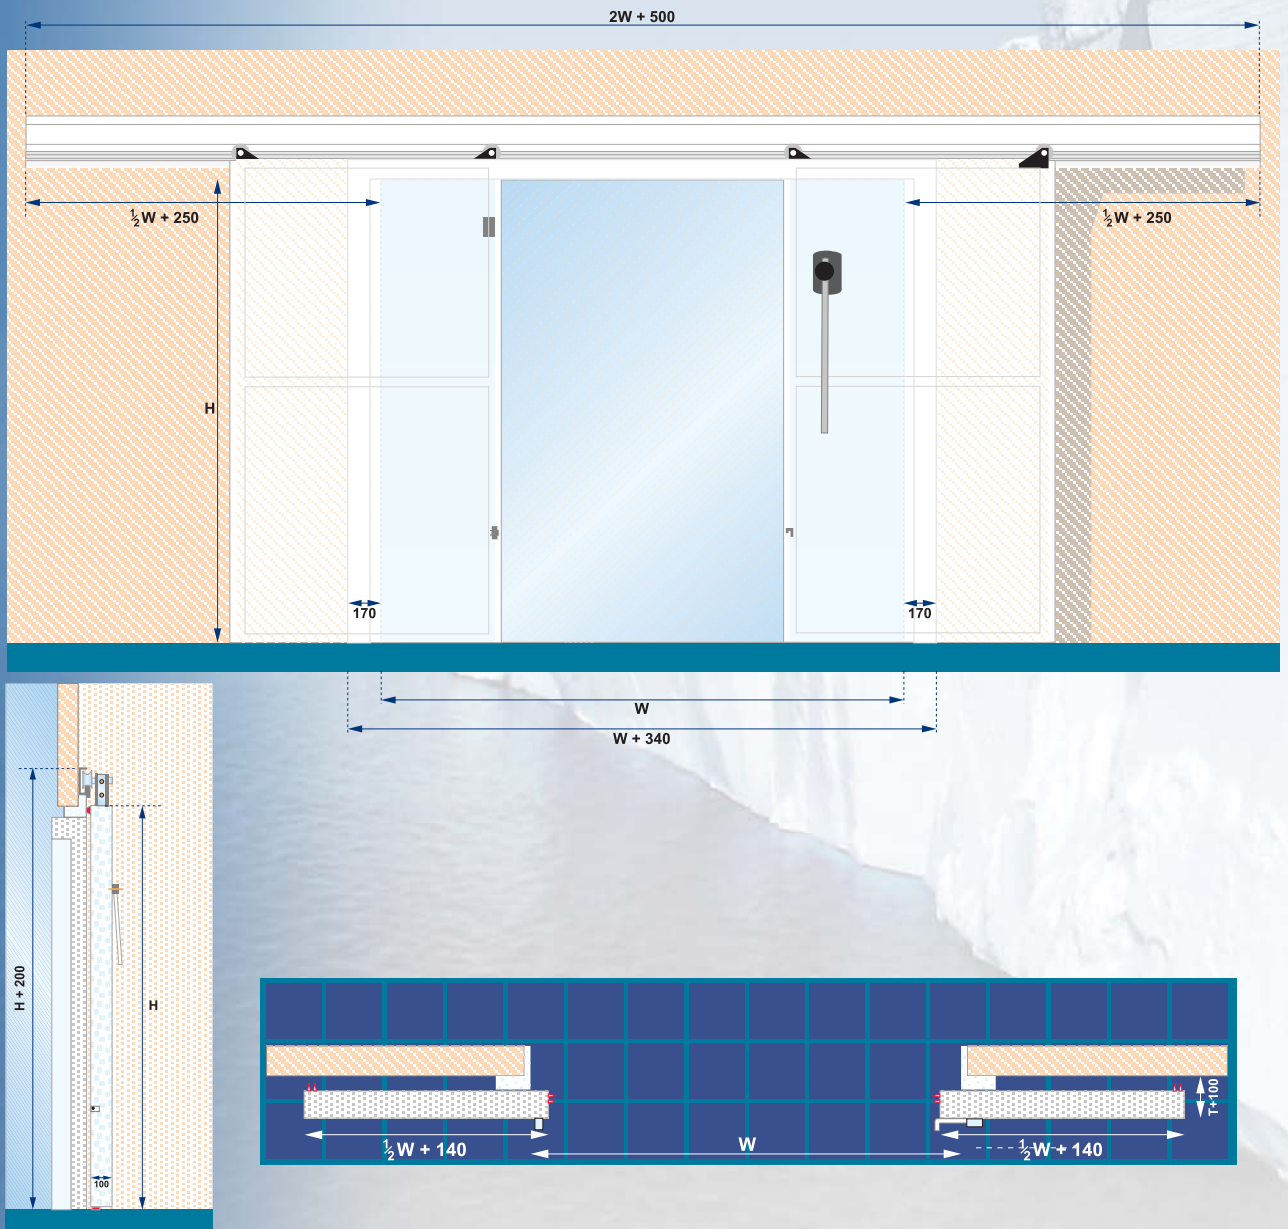

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD DS-T*-2428	(2X130) X 283	240 X 280
NSD DS-T*-2728	(2X145) X 283	270 X 280
NSD DS-T*-3028	(2X160) X 283	300 X 280
NSD DS-T*-3328	(2X175) X 283	330 X 280
NSD DS-T*-2731	(2X145) X 313	270 X 310
NSD DS-T*-3031	(2X160) X 313	300 X 310
NSD DS-T*-3331	(2X175) X 313	330 X 310
NSD DS-T*-3034	(2X160) X 343	300 X 340
NSD DS-T*-3334	(2X175) X 343	330 X 340

- Door Insulation :** PUR/foam plates 40 kg/m³.
- Sliding Rail :** Saltwater resistant anodized aluminium profile with polyamide rollers and galvanized steel pin bolt.
- Frame :** Galvanized steel, Stainless steel, or colored steel.
- Handle :** Solid stainless steel.
- Bottom guide :** Saltwater resistant anodized aluminium profile.

T*: T 07 or T 10 or T 13.

NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.


DOUBLE HINGED DOORS / CHILL



نوبوغ سرمايش

Manual chill hinged door made from galvanized steel, stainless steel, or colored steel.

NOBOUGH SARMAYESH

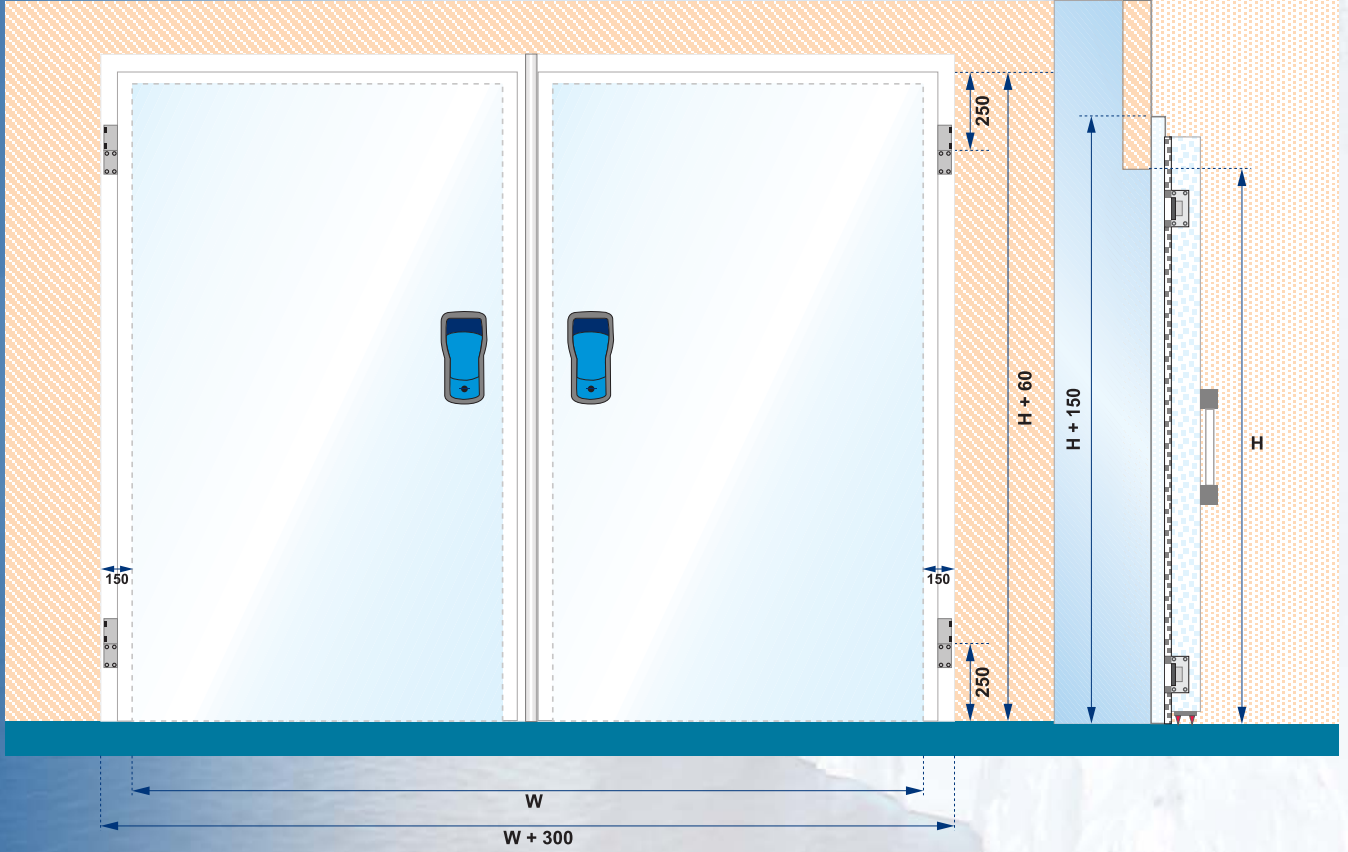

- Door Insulation :** PUR/foam plates 40 kg/m3.
- Things :** Die cast alloy execution with stainless steel pin and non-friction bushings.
- Frame :** Galvanized steel, Stainless steel, or colored steel.
- Handle :** Die cast alloy.
- Bottom guide :** Saltwater resistant anodized aluminium profile.

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD DH-T*-1822	(2X190) X 223	180 X 220
NSD DH-T*-2125	(2X220) X 253	210 X 250
NSD DH-T*-2425	(2X250) X 253	240 X 250

T*: T 07 or T 10.



NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.

SINGLE PVC DOORS



نېوځ سرمايش

NOBOUGH SARMAYESH

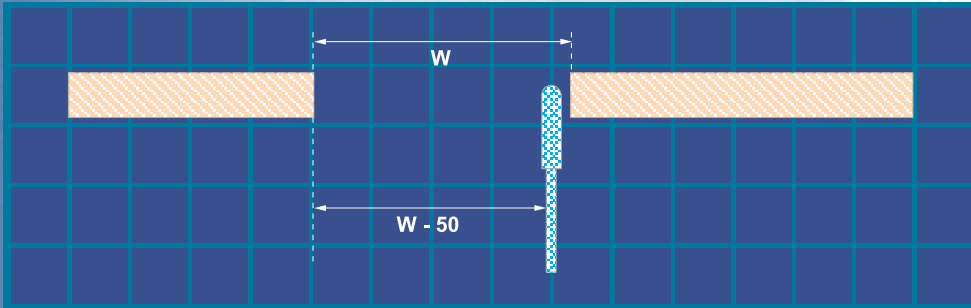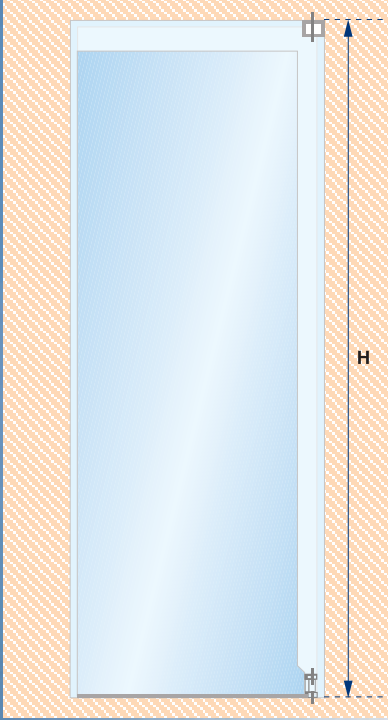

- Doorleaf** : 7 mm soft transparent PVC.
Suspension : Galvanized industrial execution or stainless steel execution.

Torsion spring arrangement installed in the upper suspension profile.

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD P SH-0719	68 X 188	70 X 190
NSD P SH-0919	88 X 188	90 X 190
NSD P SH-1222	118 X 218	120 X 220



NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.

DOUBLE PVC DOORS



نوبوغ سرمايش

NOBOUGH SARMAYESH

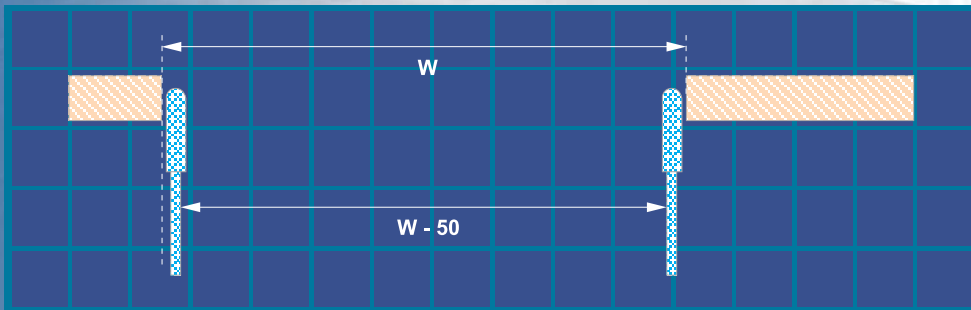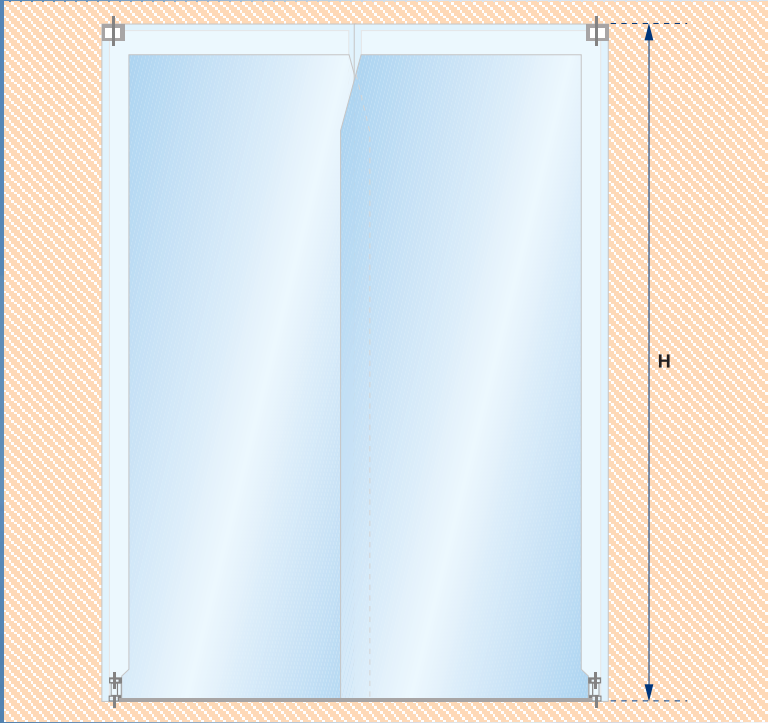

MODEL	PANEL SIZE (W) X (H)	CLEAR OPENING SIZE
NSD P DH-1522	73 X 218	150 X 220
NSD P DH-1825	88 X 248	180 X 250
NSD P DH-2125	103 X 248	210 X 250
NSD P DH-2128	103 X 278	210 X 280

- Doorleaf** : 7 mm soft transparent PVC.
- Suspension** : Galvanized industrial execution or stainless steel execution.

Torsion spring arrangement installed in the upper suspension profile.

NOTE : The above dimensions are our standard product range. However for nonstandard sizes please contact us.

DOORS THERMAL CONDUCTIVITY



نېوځ سرمايش


NOBOUGH SARMAYESH

THERMAL CONDUCTIVITY CHART

7	cm	0.223 W/m ² °K
10	cm	0.185 W/m ² °K
13	cm	0.119 W/m ² °K

-273 °C = 0 °K = Absolute Zero



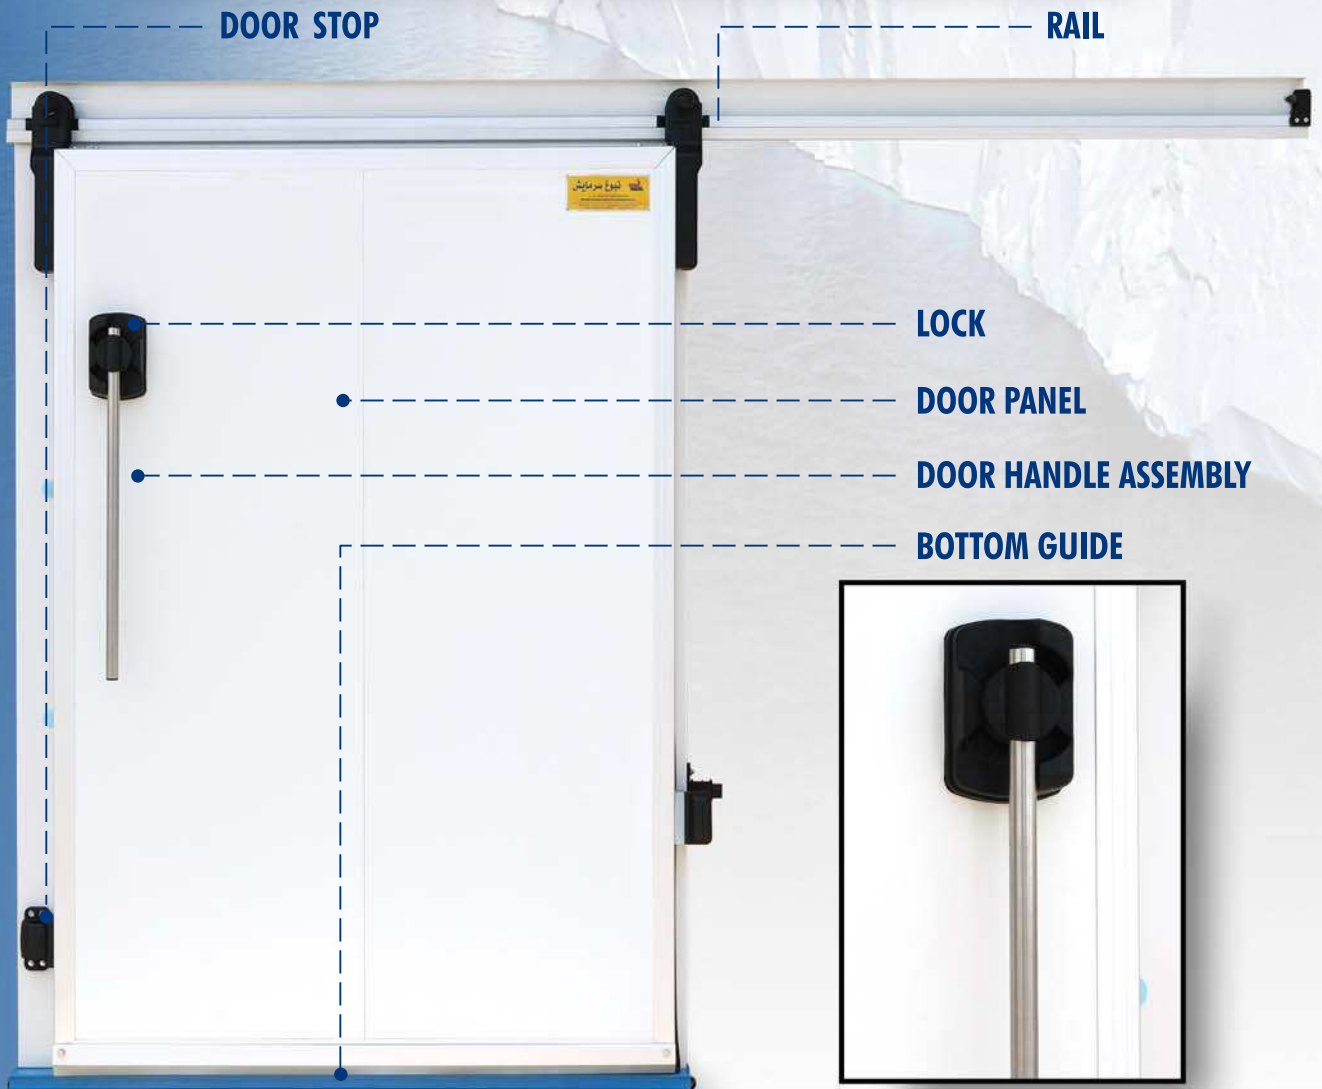



آدرس کارخانه : اراک ، شهرک صنعتی شماره ۲ اراک
تلفن : ۵ - ۳۵۷۳۳۰۱ (۰۸۶۱) فکس : ۳۵۷۳۲۴۶ (۰۸۶۱)
تلفن هماهنگی تهران : ۸۸۳۰۲۵۹۳

Industrial zone 2 , Arak - Iran
Tel.: (0861) 3573301-5, fax : (0861) 3573246
Tehran central office : 021- 88302593
w w w . n s i n d c o . c o m